




---

## Pectel SQ6M ECU

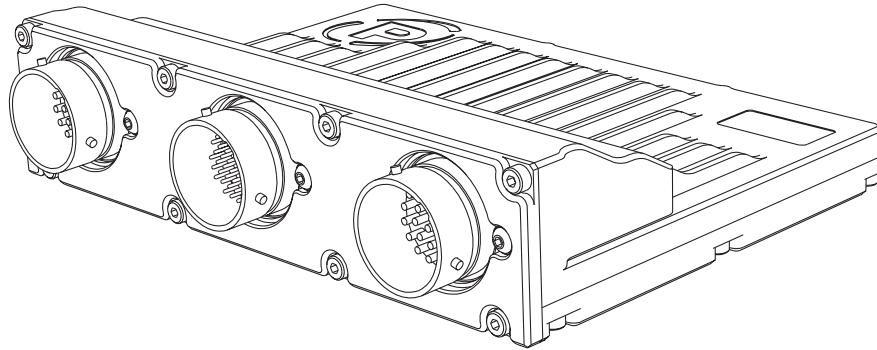

### Introduction

---

The Pectel SQ6M sets the benchmark for high-performance engine management systems. Its Motorola MPC565 microprocessor and dedicated timer co-processor bring class leading performance in a cost-effective package. No other ECU offers the same combination of price, power, performance and flexibility.

Twelve configurable injector drivers combined with eight IGBT ignition outputs AND eight logic level coil driving outputs make this ECU capable of fully sequential fuelling on normally aspirated, turbo and supercharged engines from one to twelve cylinders. Fly-by-wire capability is included, with Stepper and DC motors catered for. Put all of this functionality in one small light box and you have an ECU capable of working with almost any combination of coil, injector, OEM sensor and actuator.

An all new crank and camshaft pattern recognition system allows the SQ6M to be used with virtually any OEM timing wheel. This sophisticated pattern recognition algorithm also facilitates synchronisation during slow and uneven cranking conditions.


Hugely flexible, the SQ6M has two, and sometimes three functions on many of its pins:

- unused injector and IGBT ignition outputs can be used as digital outputs
- unused digital inputs can be used as 10 bit analogue inputs
- H-bridge outputs can be used in either full or half bridge mode, H-bridge outputs a stepper motor or used to provide additional high or low-side drive capability.

All of these features are enabled by software. Designed to be robust, the SQ6M has reverse-battery, over-voltage and load dump protection built in as standard. Sensor supply and signal ground pins are also protected against shorts to battery positive and negative.

Advanced software features include traction control, launch control, gearshift strategies, variable valve timing of up to 4 camshafts (including BMW VANOS), high speed data logging and scrutineering modes for single make championships.

## Dimensions

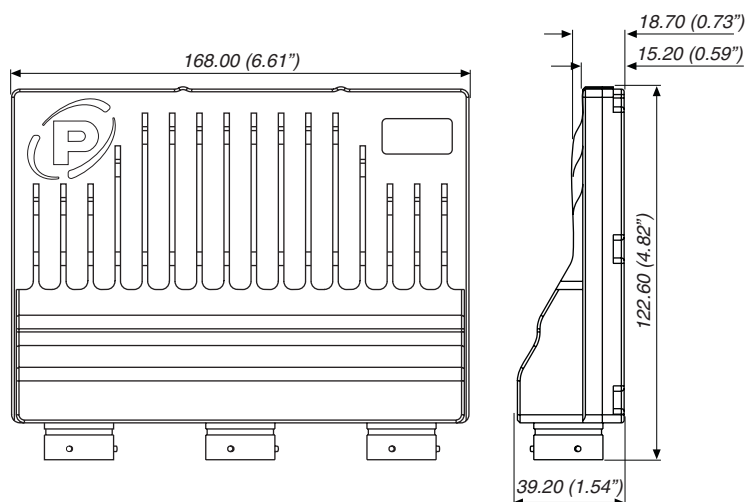

Dimensions in millimetres (and inches)

## Specifications

Description	Value
Processor	Motorola MPC565 @ 56MHz, 5 MB flash memory & 4MB non-volatile RAM
Supply Voltage	8V—18V reverse battery, over-voltage and load dump protection
Engine Configuration	1 to 12 cylinders 2/4 stroke or rotary Natural/Forced induction
Digital Outputs	6 PWM dedicated (12A) 8 PWM alternate function (5A) 16 Relay alternate function
Digital Inputs	10 dedicated
Logging throughput	1000 samples/second
Crank & Cam Sensor	3 Hall Effect/Inductive
Injector Drivers	12 peak and hold (0-5A)

Quoted currents are peak rating

Description	Value
Analogue Inputs	12 dedicated (12 bit) 2 x Wide band lambda (12 bit) 2 x Knock sensor (12 bit) 2 x K-type thermocouple (12 bit) 10 alternate function (10 bit)
Internal Sensors	ECU Internal Temperature x 4 Battery Voltage
Ignition Drivers	8 IGBT Internal Clamp (400V 20A) 8 Logic Level driven ( 5 or 12 V)
Auxiliary Outputs	1 Full Bridge (12A) 2 Full Bridge (5A) 1 Stepper Motor alternate function
Communication	1 RS232 3 CAN 2.0B 1 Ethernet (10MBit)
Operating Temp	-40C to +85C
Weight	570g

## Connector Details

ECU Connector	Mating Connector
AS2-16-26PN	AS6-16-26SN
AS2-16-26PA	AS6-16-26SA
AS2-16-35PN	AS6-16-35SN


See below for pinout information.

## Ordering Information

Product	Part number
Pectel SQ6M ECU	01E-500720
PPCAN adaptor for PC Comms	01E-500320
Serial cable for PC Comms	01E-500026



## Pinout Details

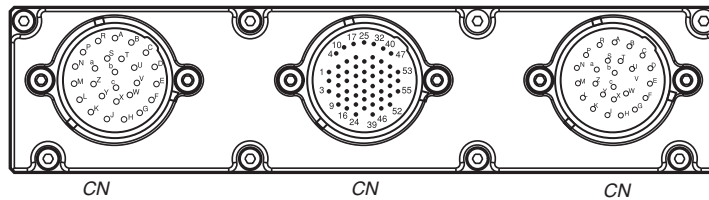

SQ6M connectors

### AS216-26PN Pin information

Pin	Dir	Function	Function	Notes
L	Battery	VBAT	ECU Battery Positives	20v, 10A cont.
M	Battery	VBAT		
Y	Battery	ENG GND	ECU Battery Negatives	20v, 10A cont.
Z	Battery	ENG GND		
a	Battery	ENG GND		
K	O	IGN1	Ignition Coils	400v, 20A max, 5A cont.
J	O	IGN2		
H	O	IGN3		
G	O	IGN4		
F	O	IGN5		
E	O	IGN6		
X	O	INJ1	Injector Outputs	100v, 10A max, 5A cont.
W	O	INJ2		
A	O	INJ3		
R	O	INJ4		
B	O	INJ5		
T	O	INJ6		
C	O	INJ7		
U	O	INJ8		
D	O	INJ9		
V	O	INJ10		
b	O	PWM1	PWM Outputs	20v, 12A cont. 10kΩ Pullup to VBAT
c	O	PWM2		
P	O	PWM3		
S	O	PWM4		
N	O	PWM5		

**AS216-35PN Pin information**

Pin	Dir	Function	Function	Notes
20	I	AIN1	12bit Analogue Inputs	Software pullups 3kΩ & 33kΩ
6	I	AIN2		
27	I	AIN3		
2	I	AIN4		
19	I	AIN5		
7	I	AIN6		
18	I	AIN7		
3	I	AIN8		
24	I	AIN9	12bit Analogue Inputs	Software pullups 3kΩ & 240Ω
8	I	AIN10		
23	I	AIN11		
9	I	AIN12	Thermocouples Positive (12bit)	
11	I	TC1 POS		
4	I	TC2 POS	Themocouple Negative	
13	I	TC NEG	Lambda	
12	I	LAMV1	Lambda Current Pump	
17	O	LAMI1	Lambda	
5	I	LAMV2	Lambda Current Pump	
10	O	LAMI2	Knock Sensor	
39	I	DET1	Crank Inputs	Software Pullup 3kΩ
38	I	DET2		
40	I	CRANK1	CAM Input	
31	I	CRANK2	Digital Inputs	Software Pullup 3kΩ
41	I	CAM		
49	I	DIN1		
53	I	DIN2		
50	I	DIN3		
54	I	DIN4		
47	I	DIN5		
44	I	DIN6		
42	I	DIN7		
48	I	DIN8		
35	I	DIN9	RS232 port	
51	I	DIN10		
29	O	RS232TX	Ethernet PC comms	
36	I	RS232RX		
21	O	ETHER TXPOS		
28	O	ETHER TXNEG		
22	I	ETHER RXPOS		
14	I	ETHER RXNEG		



Pin	Dir	Function	Function	Notes
45	I/O	CAN1 LOW	CAN Communication port	
52	I/O	CAN1 HIGH		
26	I/O	CAN2 LOW		
32	I/O	CAN2 HIGH		
33	O	OUT 5V0 / 12V	Programmable Sensor Supply Output 1	20v, 1A cont.
55	O	OUT 5V0 / 12V		
15	O	OUT 12V / 5V0	Programmable Sensor Supply Output 2	20v, 1A cont.
16	O	OUT 12V / 5V0		
46	-	Unused		
1	I/O	ANG GND	Protected Sensor Grounds	20v, 1A cont.
37	I/O	ANG GND		
25	I/O	CRANK/CAM GND		
30	I/O	DIG GND		
34	I/O	DIG GND		
43	I/O	COMMS GND		

**AS216-26PA Pin information**

Pin	Dir	Function	Function	Notes
A	Battery	VBAT	ECU Battery Positives	20v, 10A cont.
B	Battery	VBAT		
S	Battery	ENG GND	ECU Battery Negatives	20v, 10A cont.
T	Battery	ENG GND		
U	Battery	ENG GND		
C	O	IGN7	Ignition Coils	400v, 20A max, 5A cont.
D	O	IGN8		
V	O	INJ11	Injector Outputs	100v, 10A max, 5A cont.
W	O	INJ12		
c	O	PWM6	PWM Output	20v, 12A cont. 10k $\Omega$ Pullup to VBAT
F	O	HB3A	DC Motor drivers	20v, 12A cont.
E	O	HB3B		
P	O	HB1A	Stepper Motor drivers	20v, 5A cont.
R	O	HB1B		
a	O	HB2A		
b	O	HB2B		
M	O	IGNT1	"TTL" Ignitions	20v, 7mA cont.
N	O	IGNT2		
L	O	IGNT3		
Z	O	IGNT4		
K	O	IGNT5		
Y	O	IGNT6		
J	O	IGNT7		
X	O	IGNT8		
G	I/O	CAN3 LOW	CAN Communication port	
H	I/O	CAN3 HIGH		



## 7. Declaration of Conformity

We, the undersigned,

Pi Research  
Brookfield Motorsports Centre,  
Cottenham,  
Cambridgeshire, CB4 8PS  
United Kingdom

Certify and declare under our sole responsibility that the following equipment:

SQ6M – part number 500720  
An ECU for use only in motorsport applications


Conforms to the following EC directives including applicable amendments:

EMC Directive 89/336/EEC, 72/245/EEC (last amended 2004/104/EC)

The following standards have been applied:

2004/104/EC

Cottenham, 27<sup>th</sup> February 2006

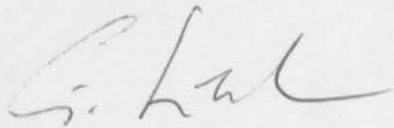

---

George Lendrum - Director of Motorsport